





## KOMA PRECISION

For over thirty-five years Koma Precision has been the foremost source for the finest the world has to offer in machine tool Productivity Innovation.


With over 30,000 rotary table installations, Koma is the largest distributor of Tsudakoma NC rotary tables and indexers in the world. With over 12,000 angle heads and live tools installed, Koma is the world's largest supplier for Alberti - the originator and the foremost innovator of productivity tooling.



## SMART CHANGE SYSTEM


New from Alberti, a complete range of live tools with interchangeable adapters for Okuma are now available in stock. The SmartChange System units have a standard profile with **no additional projection** to reduce the chance of interference with the machine's enclosures. Alberti's patent pending design creates **three points of contact** between the driven tool holder body and tool holder output surfaces so there is no compromise in concentricity and rigidity to gain the speed and convenience of quick-change tooling. With the SmartChange System one set of live tools can always stay in the machine with only the adapters needing to be changed. This provides **improved efficiency and flexibility**, plus a reduction in overall tooling costs.

## QUICK, EASY & PRECISE

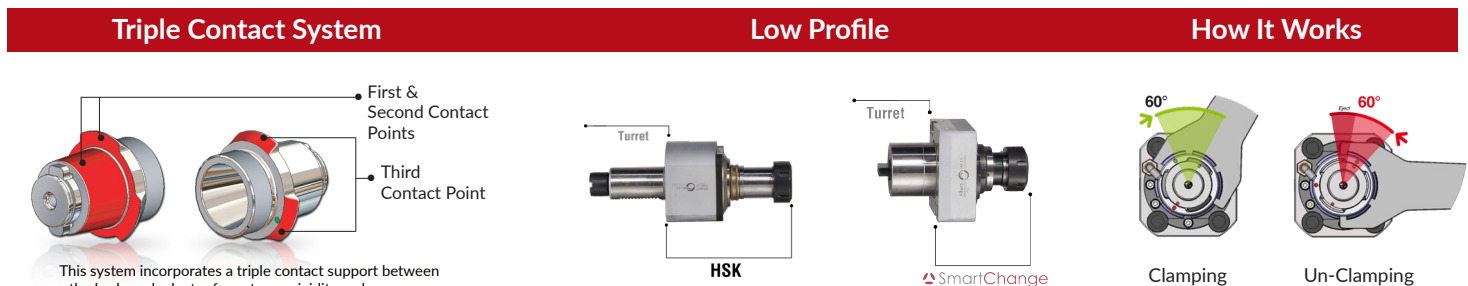

The patent pending Alberti SmartChange collet clamp & wrench system quickly and precisely locks the quick change adapter, reducing tool cutter changing time to a minimum.

## HIGHEST ACCURACY & REPEATABILITY

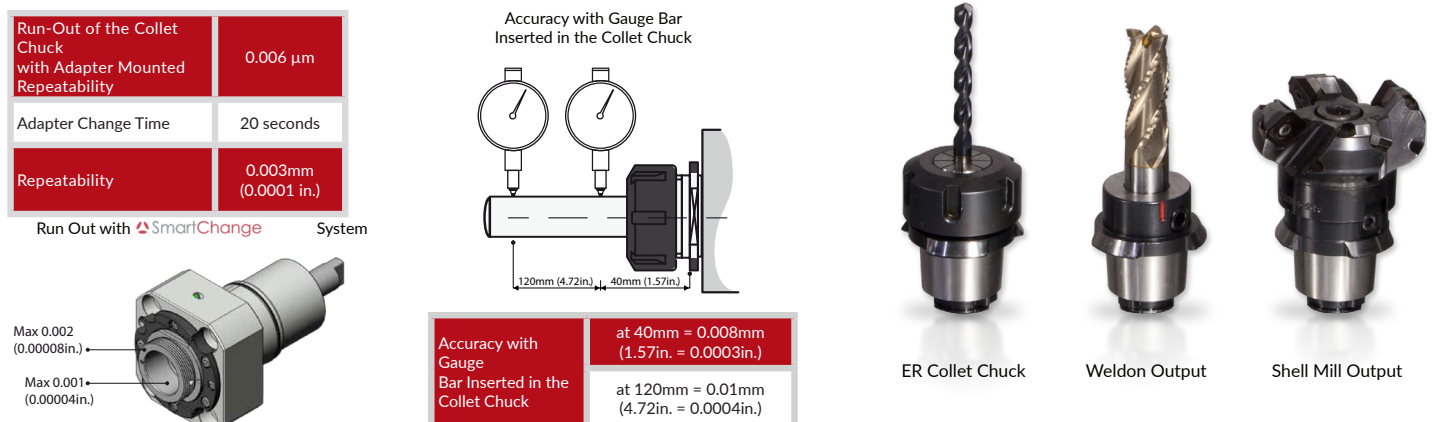



## CROSS DRILL TOOLS

Tool	Tool Type	GH Number	Output	Torque	RPM
A26330-SC	Standard	GH-66586-00	SC2*	-	8,000
A26330C-SC	Coolant Thru	GH-66635-00	SC2*	-	8,000



## FACE DRILL TOOLS

Tool	Tool Type	GH Number	Output	Torque	RPM
A26333-SC	Standard	GH-66587-00	SC2*	25.1	8,000
A26333C-SC	Coolant Thru	GH-66637-00	SC2*	25.1	8,000
A26333-SC H=75	Extended Length	GH-66980-00	SC2*	25.1	8,000

Coolant Pressure = 70 Bar/1050 PSI • RPM = Maximum • Torque = Nm

\* SC2 Adapter not included. Output must be purchased separately.

\*Each tool comes with a Main Spindle Anti-Rotation Wrench & a Long Handle Wrench for Lock / Unlock Nut.  
For additional adapters & accessories, see below.





## CROSS DRILL TOOLS

Tool	Tool Type	GH Number	Output	Torque	RPM
KZ-1510-SC2	Standard	GH-41510-13	SC2*	-	6,000
KZ-1510C-SC2	Coolant Thru	GH-41510-14	SC2*	-	6,000




## FACE DRILL TOOLS


Tool	Tool Type	GH Number	Output	Torque	RPM
KZ-1513-SC2	Standard	GH-41513-20	SC2*	25.1	6,000
KZ-1513C-SC2	Coolant Thru	GH-41513-22	SC2*	25.1	6,000

Coolant Pressure = 70 Bar/1050 PSI • RPM = Maximum • Torque = Nm


## ADDITIONAL ADAPTERS



ER COLLETS		
Size		
ER-20	-	SC2-ER20
ER-25	-	SC2-ER25
ER-32	-	SC2-ER32



WELDON OUTPUTS		
Size		
1/4"	-	SC2-.250
3/8"	-	SC2-.375
1/2"	-	SC2-.500
5/8"	-	SC2-.625



SHELL MILL ARBORS		
Size		
3/4"	-	SC2-SM.750

## MEASURING FIXTURES



SMART CHANGE TOOL POT		
Size		
40 Taper	-	GP-56661-00
50 Taper	-	GP-56548-00



HOLDING FIXTURE	
GP-56968-00	

Note: Holding fixture does not include adapter and wrench.



Tel: 1.800.249.5662  
Fax: 860.623.4132

info@komaprecision.com  
www.komaprecision.com

20 Thompson Road  
East Windsor, CT 06088